



AS-40 GLYCOL GREEN LINE MODELS

COOLING OUTPUT OF 25-40 L/HOUR

CZECH UP YOUR BEER
COOLING AND DISPENSING SYSTEMS

AS-40 GLYCOL is a suitable cooler for cooling down of special towers and beer tanks using glycol. The cooling unit reaches a maximum output of up to 40 liters per hour and provides a cooling capacity of 25 liters per hour at continuous output. The device is suitable for cooling down of fermentation tanks during fermentation of beer production, cooling and freezing of wine and musts. The glycol model is equipped with an agitator pump and a digital thermostat. The overflow is located on the side of the cooler and regulates the maximum level of the water bath.



ADVANTAGES AND FUNCTIONAL CHARACTERISTICS OF THE AS LINDR LINE:

AS – technology of water cooling with an ice bank. This machine can provide maximum cooling output.

GREEN LINE – LINDR GREEN LINE technology is environmentally friendly thanks to the use of eco-friendly refrigerant R-290. We have introduced an energy saving system in the production. Thanks to this design, each product achieves **20% higher energy efficiency and 20% lower energy consumption**.

CONSTRUCTION AND SERVICING – the modern arrangement of LINDR cooling technology ensures ease of access for potential servicing and maintenance.


PERFORMANCE, QUALITY, SIZE – the best performance/ quality/ size ratio.

✓ **GREEN LINE** – all models from the AS series are fully in GREEN LINE design.

✓ **COMFORTABLY PORTABLE** – easy and safe handling thanks to two stainless steel handles on the sides of the device.

✓ **EQUIPMENT** – the digital thermostat enabling continuous and precise temperature control and an agitator pump with a displacement of 6 m.

TECHNICAL PARAMETERS

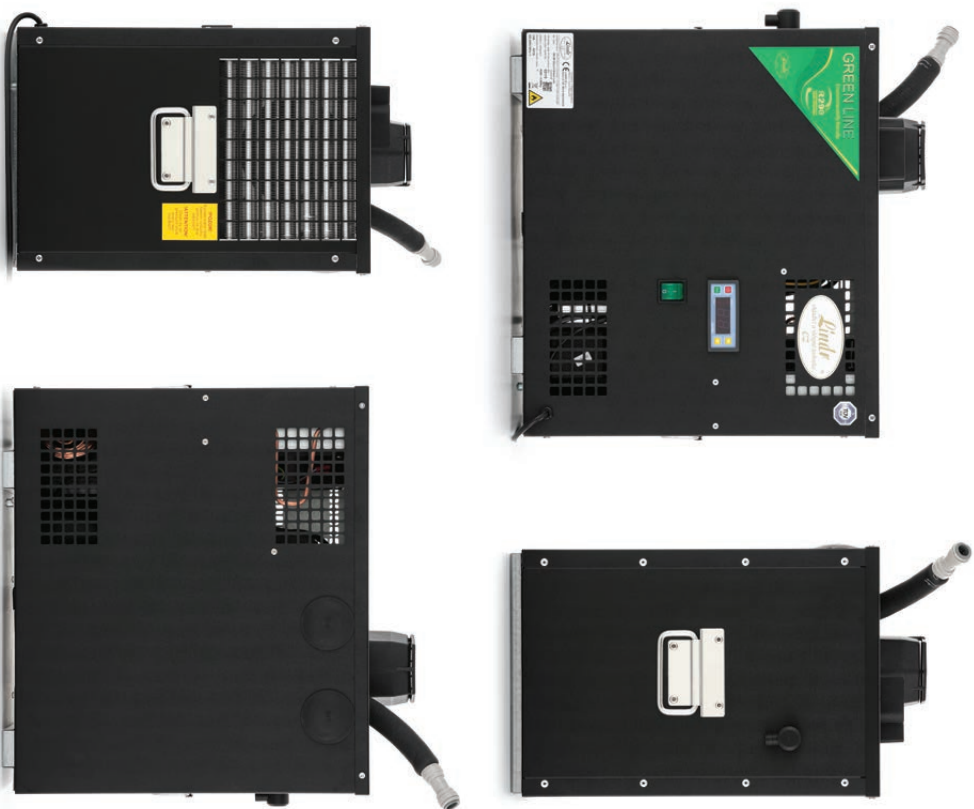

AVAILABLE CUSTOM MODIFICATION OPTIONS

POWER CABLE PLUG

Note

Selected models are also available in 115 V/60 Hz or 220 V/60 Hz voltage.
Other custom modifications are also available (contact us).

YES

PRODUCT MODEL

RS-40 GLYCOL GL

| | |
|--|-----------------|
| COOLING POWER OF THE COMPRESSOR (HP) | 1/8 |
| COOLING POWER OF THE COMPRESSOR (W) | 310 |
| MAXIMUM COOLING CAPACITY TO 0°C / TK 45°C (L/HOUR) | 40 |
| CONTINUOUS COOLING PERFORMANCE (L/HOUR) | 25 |
| THERMAL GRADIENT ΔT (°C) | 10 |
| ICE BANK (KG) | - |
| DISPLACEMENT OF RECIRCULATION PUMP (M) | 6 |
| NUMBER OF COOLED BEVERAGES (PCS) | - |
| NUMBER / LENGTH OF COOLING COILS (M) | - |
| POWER (W) | 437 |
| AMPERAGE (A) | 1,90 |
| NET WEIGHT (KG) | 17,0 |
| TYPE OF REFRIGERANT | R290 |
| VOLTAGE | 220-240V 50HZ~1 |
| CONNECTION BEER / AIR - SPEEDFIT FITTINGS | - / -, 1/2 |

